


# SECURUS SR1™

HIGH SECURITY FLAT PANEL SYSTEM  
TO LPS 1175 CATEGORY 1

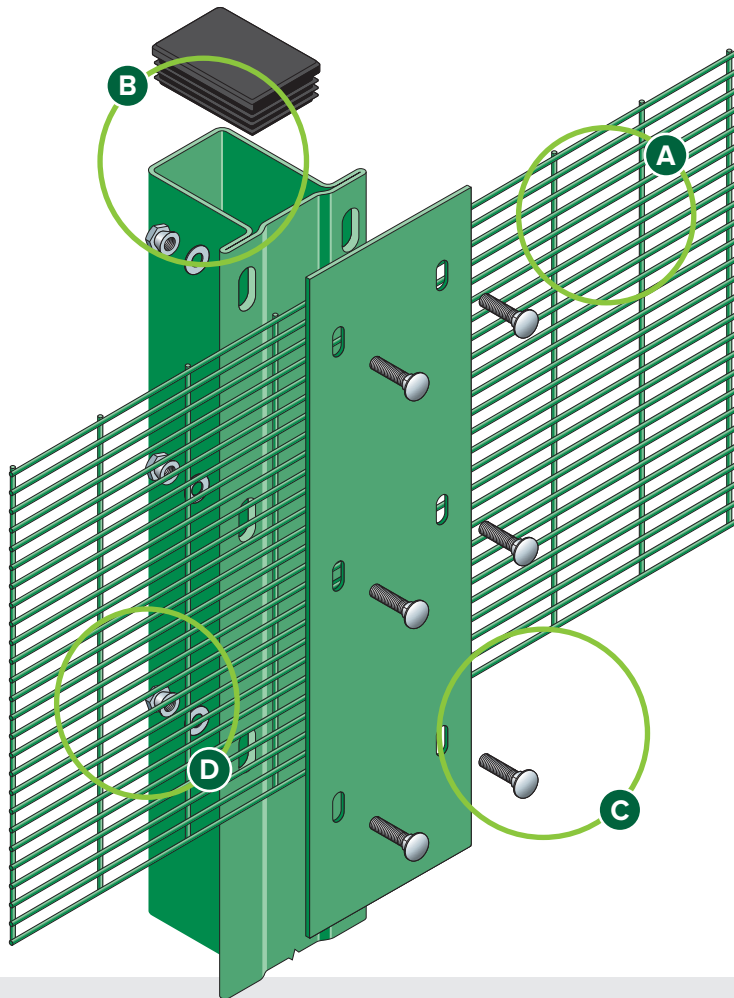

**A** Solid clamp bar for extra full-length security

**B** Continuous flanged post made from high strength steel for added durability

**C** Through bolt with security washer and non removable shearnuts

**D** Anti-climb and anti-cut through mesh

Conforms to **BS1722: Part 14**



Exploded view of post and clamp for SecurUS SR1 panel system

NB: This product has additional features not demonstrated for security reasons




## FEATURES

- Attractive appearance
- Strong wire formation
- Rolled post design
- Optional active anti-intruder toppings
- Full range of RAL colours available

## SUITABLE FOR

- Data centres
- MOD
- Police stations and secure units
- Airports and seaports
- Utility suppliers

## SYSTEM DETAILS

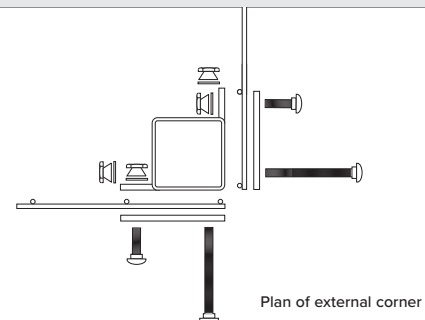

CALL 01270 764751 OR VISIT [WWW.CLD-FENCING.COM](http://WWW.CLD-FENCING.COM)



## DESCRIPTION

Few things demonstrate your commitment to protecting your people and property more than a premium high security fencing system. Securus SR1™ welded steel wire mesh fencing is the first level in a formidable defence against intruders that is approved for government use.

Ideal wherever physical security is paramount: schools, police stations, utility suppliers and even airports, it's hugely effective in the prevention of everything from vandalism to burglary and even terrorism.

Strong and durable, the anti-climb mesh fencing is fixed to a steel post with a solid clamp bar for added security. The system also carries certification to Loss Prevention Standards 1175 Security Ratings (SR1) to withstand basic tool attacks, with the ability to easily upgrade to LPS1175 Issue 7 Category 2 (SR2).

Conforming to BS 1722-14 Category 4 for all fences over 3000mm, it provides eternal confidence that your assets are safe.

You can also enhance your system from our Active Anti-Intruder range with Razor Wire and a wealth of other toppings.

## FINISH

Our welded steel wire mesh perimeter security fencing panels are galvanised and polyester powder-coated after stringent cleaning and treatment to give a well-adhered coating of 60 microns. Or available as galvanised only which is a high aluminium content galvanising giving four times the life of BS 443. This finish is free of the sharps and irregularities found in the hot dip galvanising process. RAL range of colours available.

## PANEL DIMENSIONS

|                     |                                  |
|---------------------|----------------------------------|
| Heights             | 2440, 3000mm                     |
| Panel width         | 2515mm                           |
| Mesh size           | 76.2 x 12.5mm                    |
| Wire diameter       | 4mm (horizontals and verticals)  |
| Top edge projection | Nil – wire is flush on all edges |

All dimensions are nominal

## SECURUS SR1 POSTS AND CLAMPS

For the Securus SR1 flat panel system, CLD offers their own unique state of the art post. A roll formed section designed to facilitate ease of installation, providing maximum security when combined with security fastenings.

## SLOPING GROUND

Panels can be stepped as required on the post system. Where gradients exceed 1:16, it is recommended that taller panels are either part-buried or additional posts are used. Panels can also be sloped to the following gradients, within the tolerance of the post section:

2440mm high: 1 in 60

3000mm high: 1 in 75

## VARIATIONS

The posts are available in different lengths to accommodate panel heights and ground conditions.

- Wall fixing plates, cranked posts or base plated
- Cranked or straight extensions for barbed or razor wire
- Cranked panels

Posts made from standard sections are available.

## DIMENSIONS

|                  |                                                        |
|------------------|--------------------------------------------------------|
| Posts            | 80 x 60mm special flanged section (patent applied for) |
| Corner posts     | 80 x 80mm                                              |
| Post centres     | 2520mm                                                 |
| Clamping channel | 120 x 5mm flat                                         |

